

ELECTRICAL CONDENSERS

Capacity of Spheres of unequal size widely spaced (Fig. 64).

$$C = \frac{1.11r_1r_2d}{(r_1 + r_2)d + 2r_1r_2} \quad (50)$$

r_1 and r_2 are the radii of the two spheres.
 d is their separation (measured between their centres).

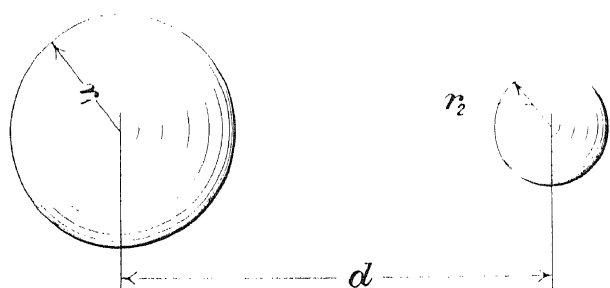


FIG. 64. TWO WIDELY-SPACED SPHERES OF UNEQUAL SIZE

Capacity of Spheres of equal size, close together (Fig. 65).

$$C = 0.556r \left(1 + \frac{x}{6r} \right) \left(1.2704 + \frac{1}{2} \log_e \frac{r}{x} + \frac{x}{18r} \right) \quad (51)$$

x is the distance between the nearest points of the spheres
 r is their radius.

NOTE. This formula gives results correct within 0.1 per cent when x/r is less than 0.1.)

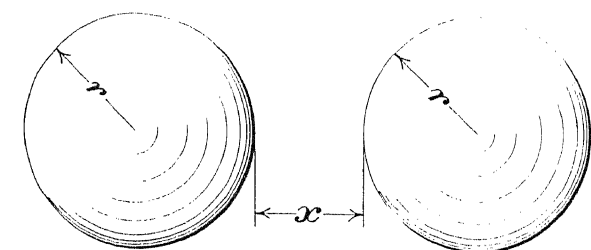


FIG. 65. PAIR OF SPHERES OF EQUAL SIZE CLOSE TOGETHER

CAPACITY OF CONDENSERS

Joint Capacity of two equal spheres, close together and isolated in space (Fig. 66).

$$C = 1.11r \left(1 + \frac{x}{6r} \right) \left(1.3863 + \frac{x}{12r} \right)$$

where x and r have the same significance as in formula (51).

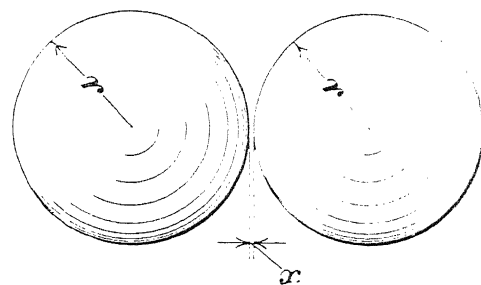


FIG. 66. TWO EQUAL SPHERES CLOSE TOGETHER

Joint Capacity of two spheres of very unequal size, close together and isolated in space (Fig. 67).

$$C = 1.11r_1 \left(1 + 2.404 \frac{r_2^3}{r_1^3} \right)$$

where r_1 is the radius of the larger sphere.
 r_2 is the radius of the smaller sphere.


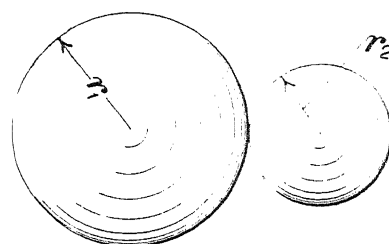


FIG. 67. TWO UNEQUAL SPHERES IN CONTACT

Capacity of Sphere and Plane (of large area) (Fig. 68).

$$C = 1.11r^2h(h+r)$$

ELECTRICAL CONDENSERS

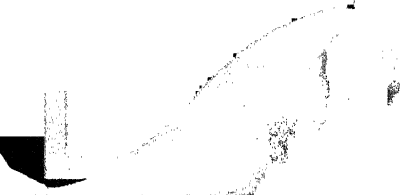

ELECTRICAL CONDENSERS

THEIR CONSTRUCTION, DESIGN
AND INDUSTRIAL USES

BY
PHILIP R. COURSEY

B. Sc., LINCOLN, M. Sc., E. E.

FELLOW OF THE PHYSICAL SOCIETY OF LONDON
MEMBER OF THE ROYAL INSTITUTE OF GREAT BRITAIN, ETC.
CHIEF ENGINEER OF DEBEHVE CONDENSER CO., LTD.



LONDON
SIR ISAAC PITMAN & SONS, LTD.
PARKER STREET, KINGSWAY, W.C.2
BATH, MELBOURNE, TORONTO, NEW YORK

1927

16630

PRINTED IN GREAT BRITAIN
AT THE FITMAN PRESS, BATH

PREFACE

ALTHOUGH the first electrical condenser was discovered nearly two centuries ago, it is only during the last two or three decades that any real progress has been made in the practical utilization of condensers. During the intervening period condensers were regarded at first only as scientific toys: while later they became purely physical laboratory apparatus. The commercial development of condensers has been slow, due perhaps in part to the above causes, and even to-day, in many quarters, condensers are still looked upon to a great extent as frail scientific instruments which cannot possibly have any serious industrial uses. There are, however, many practical applications of condensers which are growing rapidly in importance, and it is the purpose of this book to endeavour to dispel this feeling by describing the modern developments which have taken place in condensers, by illustrating their methods of manufacture on a considerable scale, and by detailing many of their present and possible future industrial applications.

The fundamental nature of condensers is described in Chapter I, and from their very general nature it follows that very many practical forms of construction are possible. These various forms have different applications, the form very largely depending upon the nature of use. The origin of some of these forms, as resulting from the early discoveries and history of condensers, may be traced in Chapter II, which describes the principal discoveries and experiments of the early days of condensers, and deals also with the development of various theories for explaining condenser action, and the phenomena observed in various dielectrics used in condensers.

Radio telegraphy and more recently, radio broadcasting, has until recently constituted the most important application of condensers, and has been directly responsible itself for the development of certain forms of condenser, some of which have moreover now become almost obsolete. Air, glass, and mica,

12630

PRINTED IN GREAT BRITAIN
AT THE PITMAN PRESS, BATH

PREFACE

ALTHOUGH the first electrical condenser was discovered nearly two centuries ago, it is only during the last two or three decades that any real progress has been made in the practical utilization of condensers. During the intervening period condensers were regarded at first only as scientific toys; while later they became purely physical laboratory apparatus. The commercial development of condensers has been slow, due perhaps in part to the above causes, and even to-day, in many quarters, condensers are still looked upon to a great extent as frail scientific instruments which cannot possibly have any serious industrial uses. There are, however, many practical applications of condensers which are growing rapidly in importance, and it is the purpose of this book to endeavour to dispel this feeling by describing the modern developments which have taken place in condensers, by illustrating their methods of manufacture on a considerable scale, and by detailing many of their present and possible future industrial applications.

The fundamental nature of condensers is described in Chapter I, and from their very general nature it follows that very many practical forms of construction are possible. These various forms have different applications, the form very largely depending upon the nature of use. The origin of some of these forms, as resulting from the early discoveries and history of condensers, may be traced in Chapter II, which describes the principal discoveries and experiments of the early days of condensers, and deals also with the development of various theories for explaining condenser action, and the phenomena observed in various dielectrics used in condensers.

Radio telegraphy and more recently, radio broadcasting has until recently constituted the most important application of condensers, and has been directly responsible itself for the development of certain forms of condenser, some of which have moreover now become almost obsolete. Air, glass, and mica,

16630

PREFACE

ALTHOUGH the first electrical condenser was discovered nearly two centuries ago, it is only during the last two or three decades that any real progress has been made in the practical utilization of condensers. During the intervening period condensers were regarded at first only as scientific toys ; while later they became purely physical laboratory apparatus. The commercial development of condensers has been slow, due perhaps in part to the above causes, and even to-day, in many quarters, condensers are still looked upon to a great extent as frail scientific instruments which cannot possibly have any serious industrial uses. There are, however, many practical applications of condensers which are growing rapidly in importance, and it is the purpose of this book to endeavour to dispel this feeling by describing the modern developments which have taken place in condensers, by illustrating their methods of manufacture on a considerable scale, and by detailing many of their present and possible future industrial applications.

The fundamental nature of condensers is described in Chapter I, and from their very general nature it follows that very many practical forms of construction are possible. These various forms have different applications, the form very largely depending upon the nature of use. The origin of some of these forms, as resulting from the early discoveries and history of condensers, may be traced in Chapter II, which describes the principal discoveries and experiments of the early days of condensers, and deals also with the development of various theories for explaining condenser action, and the phenomena observed in various dielectrics used in condensers.

Radio telegraphy and more recently, radio broadcasting has until recently constituted the most important application of condensers, and has been directly responsible itself for the development of certain forms of condenser, some of which have moreover now become almost obsolete. Air, glass, and mica,

It is to be noted that most of their development has been in the other dielectrics can now be made. The latter is being continuously improved and work. The essential features of the dielectrics which fit them for use in the various types of III to V, together with the methods of their determination and

of the dielectric properties, and of the physical properties of the dielectric, its electrostatic capacity is calculated, with a very fair degree of accuracy, and the formulae for this purpose are derived for the various types of condensers; also the formulae for calculating the inductance of overhead lines, and the resistance and inductance of overhead lines and wires used for radio

2. The design of condensers in connection with the design of the transformer is described in Chapter VIII, in accordance with the types and electric stresses applied to the windings of the transformer.

3. The design of the various forms of condensers for such applications is described in Chapter IX.

The book is written in a style which uses has to-day developed
 the "trial and error" methods, and the "cut and try" method, as is detailed
 in the text. The book contains several Charts and
 tables of data, and calculations relative to the design of
 condensers. Means and methods for determining actual measurements are
 given. Descriptions are given of most of the types of capacity measurements,
 and the tests required to-day for condensers.

radio broadcasting, have been made in the field of developing developments and inventions in the field of communications used therewith. No other example of such invention is known to the inventor in the case of variable

condensers. The varieties of these condensers are now almost legion, and in consequence they differ only a little from one another. Certain novel features of construction are, however, incorporated in many designs, and the more important of these are illustrated in Chapter XI, although owing to their number by no means all the models on the market to-day are described. The list of British patents relating to such condensers (which is included in the Bibliography) testifies also to the attention that has been bestowed upon this radio component. Certain of these condensers, which make use of a solid dielectric instead of air, are grouped into Chapter XII.

The special applications of certain dielectrics to modern electrical condensers are dealt with in Chapters XIII to XVIII, wherein many forms of such condensers utilizing air, glass, oil, paper, mica, and "cellon" dielectrics, are described and illustrated. The chief uses to which these types of condensers are applied are also dealt with, including high-tension electric power circuits (Chapter XVIII) and power-factor improvement (Chapter XIX). Various other applications are described and possible developments foreshadowed in Chapter XX, and the volume is concluded with an extensive Bibliography relating to dielectrics and to condensers, which includes a list of British patents on the same subjects, and relating thereto, which it is hoped is complete up to the present date.

The voluminous literature relating to dielectrics precludes the possibility of including all references which might be of some interest in connection with this subject, but it is hoped that the majority of the articles and publications of importance have been mentioned. Notification of any omissions or corrections to this section will be particularly welcomed from readers. In many cases the references given include abstract references to *Science Abstracts*, or other publications wherein similar abstracts appear, as it is felt that by this means searching in the literature of a subject is facilitated.

Many of these bibliographical references are mentioned in the text of the book, and are referred to therein by number. It is hoped that this collection will be of value to research workers, and to students of this branch of electrical engineering,

PREFACE

As modern dielectrics have received most of their development in the last few years, and as other dielectrics can now be used as condensers, and their number is being continuously increased, as a result of modern research work. The essential electrical properties of dielectrics, which fit them for use in condensers, are set forth in Chapters III to V, together with methods which may be used in their determination and measurement.

Of the knowledge of these properties, and of the physical dimensions of the parts of a condenser, its electrostatic capacity can in many cases be calculated with a very fair degree of accuracy. Numerous formulae for this purpose are derived and tabulated in Chapter VI for various types of condensers; while in Chapter VII, corresponding formulae for elevated wires and cables are discussed in connection with overhead electric power transmission lines, and wires used for radio circuits.

The many modern uses of condensers in connection with radio apparatus are classified in Chapter VIII, in accordance with the nature of the voltages and electric stresses applied to the condensers, and typical forms of condensers for such uses are described and illustrated.

The design of condensers for various uses has to-day developed very considerably from early "trial and error" methods, and is now susceptible of accurate calculation, as is detailed in Chapter IX, wherein also are given several Charts and Curves to facilitate such calculations, and calculations relative to circuits utilizing condensers. Means and methods for checking up these calculations by actual measurements are dealt with in Chapter X. Descriptions are given of most practical forms of Bridge and Meter for capacity measurements, while the more extended tests required to-day for condensers are also described in some detail.

The world-wide developments in radio broadcasting have brought in their train corresponding developments and inventions relating to component apparatus used therewith. Nowhere, perhaps, is there a better example of such invention applied to a small component than in the case of variable

condensers. The varieties of these condensers are now almost legion, and in consequence they differ only a little from one another. Certain novel features of construction are, however, incorporated in many designs, and the more important of these are illustrated in Chapter XI, although owing to their number by no means all the models on the market to-day are described. The list of British patents relating to such condensers, which is included in the Bibliography) testifies also to the attention that has been bestowed upon this radio component. Certain of these condensers, which make use of a solid dielectric instead of air, are grouped into Chapter XII.

The special applications of certain dielectrics to modern electrical condensers are dealt with in Chapters XIII to XVIII, wherein many forms of such condensers utilizing air, glass, oil, paper, mica, and "cellon" dielectrics, are described and illustrated. The chief uses to which these types of condensers are applied are also dealt with, including high-tension electric power circuits (Chapter XVIII) and power-factor improvement (Chapter XIX). Various other applications are described and possible developments foreshadowed in Chapter XX, and the volume is concluded with an extensive Bibliography relating to dielectrics and to condensers, which includes a list of British patents on the same subjects, and relating thereto, which it is hoped is complete up to the present date.

The voluminous literature relating to dielectrics precludes the possibility of including all references which might be of some interest in connection with this subject, but it is hoped that the majority of the articles and publications of importance have been mentioned. Notification of any omissions or corrections to this section will be particularly welcomed from readers. In many cases the references given include abstract references to *Science Abstracts*, or other publications wherein similar abstracts appear, as it is felt that by this means searching in the literature of a subject is facilitated.

Many of these bibliographical references are mentioned in the text of the book, and are referred to therein by number. It is hoped that this collection will be of value to research workers, and to students of this branch of electrical engineering,

as condenser dielectrics, have received most of their development in the radio sphere, but many other dielectrics can now be used for condensers, and their number is being continuously added to as a result of modern research work. The essential electrical properties of dielectrics, which fit them for use in condensers, are detailed in Chapters III to V, together with methods which may be used in their determination and measurement.

Given a knowledge of these properties, and of the physical dimensions of the parts of a condenser, its electrostatic capacity can in many cases be calculated with a very fair degree of accuracy. Numerous formulae for this purpose are derived and tabulated in Chapter VI for various types of condensers; while in Chapter VII, corresponding formulae for elevated wires and aerials are discussed in connection with overhead electric power transmission lines, and wires used for radio aerials.

The many modern uses of condensers in connection with radio apparatus are classified in Chapter VIII, in accordance with the nature of the voltages and electric stresses applied to the condensers, and typical forms of condensers for such uses are described and illustrated.

The design of condensers for various uses has to-day developed very considerably from early "trial and error" methods, and is now susceptible of accurate calculation, as is detailed in Chapter IX, wherein also are given several Charts and Curves to facilitate such calculations, and calculations relative to circuits utilizing condensers. Means and methods for checking up these calculations by actual measurements are dealt with in Chapter X. Descriptions are given of most practical forms of Bridge and Meter for capacity measurements, while the more extended tests required to-day for condensers are also described in some detail.

The world-wide developments in radio broadcasting have brought in their train corresponding developments and inventions relating to component apparatus used therewith. Nowhere, perhaps, is there a better example of such invention applied to a small component than in the case of variable

condensers. The varieties of these condensers are now almost legion, and in consequence they differ only a little from one another. Certain novel features of construction are, however, incorporated in many designs, and the more important of these are illustrated in Chapter XI, although owing to their number by no means all the models on the market to-day are described. The list of British patents relating to such condensers (which is included in the Bibliography) testifies also to the attention that has been bestowed upon this radio component. Certain of these condensers, which make use of a solid dielectric instead of air, are grouped into Chapter XII.

The special applications of certain dielectrics to modern electrical condensers are dealt with in Chapters XIII to XVIII, wherein many forms of such condensers utilizing air, glass, oil, paper, mica, and "cellon" dielectrics, are described and illustrated. The chief uses to which these types of condensers are applied are also dealt with, including high-tension electric power circuits (Chapter XVIII) and power-factor improvement (Chapter XIX). Various other applications are described and possible developments foreshadowed in Chapter XX, and the volume is concluded with an extensive Bibliography relating to dielectrics and to condensers, which includes a list of British patents on the same subjects, and relating thereto, which it is hoped is complete up to the present date.

The voluminous literature relating to dielectrics precludes the possibility of including all references which might be of some interest in connection with this subject, but it is hoped that the majority of the articles and publications of importance have been mentioned. Notification of any omissions or corrections to this section will be particularly welcomed from readers. In many cases the references given include abstract references to *Science Abstracts*, or other publications wherein similar abstracts appear, as it is felt that by this means searching in the literature of a subject is facilitated.

Many of these bibliographical references are mentioned in the text of the book, and are referred to therein by number. It is hoped that this collection will be of value to research workers, and to students of this branch of electrical engineering,

as condenser dielectrics, have received most of their development in the radio sphere, but many other dielectrics can now be used for condensers, and their number is being continuously added to as a result of modern research work. The essential electrical properties of dielectrics, which fit them for use in condensers, are detailed in Chapters III to V, together with methods which may be used in their determination and measurement.

Given a knowledge of these properties, and of the physical dimensions of the parts of a condenser, its electrostatic capacity can in many cases be calculated with a very fair degree of accuracy. Numerous formulae for this purpose are derived and tabulated in Chapter VI for various types of condensers; while in Chapter VII, corresponding formulae for elevated wires and aerials are discussed in connection with overhead electric power transmission lines, and wires used for radio aerials.

The many modern uses of condensers in connection with radio apparatus are classified in Chapter VIII, in accordance with the nature of the voltages and electric stresses applied to the condensers, and typical forms of condensers for such uses are described and illustrated.

The design of condensers for various uses has to-day developed very considerably from early "trial and error" methods, and is now susceptible of accurate calculation, as is detailed in Chapter IX, wherein also are given several Charts and Curves to facilitate such calculations, and calculations relative to circuits utilizing condensers. Means and methods for checking up these calculations by actual measurements are dealt with in Chapter X. Descriptions are given of most practical forms of Bridge and Meter for capacity measurements, while the more extended tests required to-day for condensers are also described in some detail.

The world-wide developments in radio broadcasting have brought in their train corresponding developments and inventions relating to component apparatus used therewith. Nowhere, perhaps, is there a better example of such invention applied to a small component than in the case of variable

PREFACE

condensers. The varieties of these condensers are now almost legion, and in consequence they differ only a little from one another. Certain novel features of construction are, however, incorporated in many designs, and the more important of these are illustrated in Chapter XI, although owing to the small number by no means all the models on the market to-day are described. The list of British patents relating to such condensers (which is included in the Bibliography) testifies again to the attention that has been bestowed upon this radio component. Certain of these condensers, which make use of solid dielectric instead of air, are grouped into Chapter XII.

The special applications of certain dielectrics to modern electrical condensers are dealt with in Chapters XIII to XVI, wherein many forms of such condensers utilizing air, glass, oil, paper, mica, and "cellon" dielectrics, are described and illustrated. The chief uses to which these types of condensers are applied are also dealt with, including high-tension electrodynamometer power circuits (Chapter XVIII) and power-factor improvement (Chapter XIX). Various other applications are described and the possible developments foreshadowed in Chapter XX, and the volume is concluded with an extensive Bibliography relating to dielectrics and to condensers, which includes a list of British patents on the same subjects, and relating thereto, which is hoped is complete up to the present date.

The voluminous literature relating to dielectrics precludes the possibility of including all references which might be of some interest in connection with this subject, but it is hoped that the majority of the articles and publications of importance have been mentioned. Notification of any omissions or corrections to this section will be particularly welcomed from readers. In many cases the references given include abstract references to *Science Abstracts*, or other publications wherein similar abstracts appear, as it is felt that by this means searching the literature of a subject is facilitated.

Many of these bibliographical references are mentioned in the text of the book, and are referred to therein by number. It is hoped that this collection will be of value to research workers, and to students of this branch of electrical engineering.

as condenser dielectrics, have received most of their development in the radio sphere, but many other dielectrics can now be used for condensers, and their number is being continuously added to as a result of modern research work. The essential electrical properties of dielectrics, which fit them for use in condensers, are detailed in Chapters III to V, together with methods which may be used in their determination and measurement.

Given a knowledge of these properties, and of the physical dimensions of the parts of a condenser, its electrostatic capacity can in many cases be calculated with a very fair degree of accuracy. Numerous formulae for this purpose are derived and tabulated in Chapter VI for various types of condensers; while in Chapter VII, corresponding formulae for elevated wires and aerials are discussed in connection with overhead electric power transmission lines, and wires used for radio aerials.

The many modern uses of condensers in connection with radio apparatus are classified in Chapter VIII, in accordance with the nature of the voltages and electric stresses applied to the condensers, and typical forms of condensers for such uses are described and illustrated.

The design of condensers for various uses has to-day developed very considerably from early "trial and error" methods, and is now susceptible of accurate calculation, as is detailed in Chapter IX, wherein also are given several Charts and Curves to facilitate such calculations, and calculations relative to circuits utilizing condensers. Means and methods for checking up these calculations by actual measurements are dealt with in Chapter X. Descriptions are given of most practical forms of Bridge and Meter for capacity measurements, while the more extended tests required to-day for condensers are also described in some detail.

The world-wide developments in radio broadcasting have brought in their train corresponding developments and inventions relating to component apparatus used therewith. Nowhere, perhaps, is there a better example of such invention applied to a small component than in the case of variable

condensers. The varieties of these condensers are now almost legion, and in consequence they differ only a little from one another. Certain novel features of construction are, however, incorporated in many designs, and the more important of these are illustrated in Chapter XI, although owing to their number by no means all the models on the market to-day are described. The list of British patents relating to such condensers (which is included in the Bibliography) testifies also to the attention that has been bestowed upon this radio component. Certain of these condensers, which make use of a solid dielectric instead of air, are grouped into Chapter XII.

The special applications of certain dielectrics to modern electrical condensers are dealt with in Chapters XIII to XVIII, wherein many forms of such condensers utilizing air, glass, oil, paper, mica, and "cellon" dielectrics, are described and illustrated. The chief uses to which these types of condensers are applied are also dealt with, including high-tension electric power circuits (Chapter XVIII) and power-factor improvement (Chapter XIX). Various other applications are described and possible developments foreshadowed in Chapter XX, and the volume is concluded with an extensive Bibliography relating to dielectrics and to condensers, which includes a list of British patents on the same subjects, and relating thereto, which it is hoped is complete up to the present date.

The voluminous literature relating to dielectrics precludes the possibility of including all references which might be of some interest in connection with this subject, but it is hoped that the majority of the articles and publications of importance have been mentioned. Notification of any omissions or corrections to this section will be particularly welcomed from readers. In many cases the references given include abstract references to *Science Abstracts*, or other publications wherein similar abstracts appear, as it is felt that by this means searching in the literature of a subject is facilitated.

Many of these bibliographical references are mentioned in the text of the book, and are referred to therein by number. It is hoped that this collection will be of value to research workers, and to students of this branch of electrical engineering,

as well as to manufacturers and others engaged in the industry. The growing demand for condensers of various types emphasizes the need for further research and development and, to those engaged in this work, it is hoped that this book will especially appeal.

My acknowledgments and best thanks are due to many friends and firms who have assisted in the preparation of the book, and who have supplied photographs and other data, and permission to publish some of the information contained in this book. Amongst these, the following may be specially mentioned: Messrs. Autoveyors, Ltd.; Bowyer-Lowe Co., Ltd.; Brittain's, Ltd.; Burndept Wireless, Ltd.; Cambridge Instrument Co., Ltd.; De Laval-Chadburn Co., Ltd.; Dubilier Condenser Co., Ltd.; Electric Furnace Co., Ltd.; Gambrell Bros., Ltd.; General Electric Co., Ltd.; Gesellschaft für drahtlose Telegraphie, m.b.H. (Berlin); Iliffe & Sons, Ltd.; International General Electric Co.; Isenthal & Co.; Marconi's Wireless Telegraph Co., Ltd.; Marconiphone Co., Ltd.; Metro-Vick Supplies, Ltd.; Mullard's Radio Valve Co., Ltd.; Ormond Engineering Co., Ltd.; Radio Communication Co., Ltd.; Société Anonyme des Condensateurs de Trévoux; Société Générale des Condensateurs, Fribourg (Suisse); Société Générale des Condensateurs et Appareils de Protection Électrique (Paris); H. Tinsley & Co.; C. A. Vandervell & Co.; Westinghouse Brake and Saxby Signal Co., Ltd.; Weston Electrical Instrument Co., Ltd.; and E. H. Shaughnessy, Esq. Also to my wife for her untiring help in the preparation of the Bibliographical and other sections of this book, and in the preparation of it for the press.

PHILIP R. COURSEY

RICHMOND, SURREY
June, 1926

CONTENTS

	PAGE
PREFACE	V
CHAPTER I	
THE NATURE AND FUNDAMENTAL PROPERTIES OF CONDENSERS	1
CHAPTER II	
HISTORICAL—CONDENSERS AND DIELECTRICS	23
Discovery and development of the condenser—Faraday's re- searches—Dielectrics—Dielectric theories	
CHAPTER III	
DIELECTRICS AND PROPERTIES OF DIELECTRICS	43
Charging and discharging of condenser—Insulation resistance— Absorption—Energy loss due to leakage—Dielectric properties	
CHAPTER IV	
DIELECTRIC PROPERTIES AND THEIR DETERMINATION	53
Dielectric constant—Various methods of measurement—Dielectric strength—Breakdown voltage—High-tension tests—Testing elec- trodes—Testing oils and liquids—Insulation resistance tests— Ohm-farads	
CHAPTER V	
DIELECTRIC LOSSES AND DIELECTRIC BREAKDOWN	97
Absorption—Leakage—Voltage gradient—Effect of temperature —Moisture—Dielectric losses—Equivalent resistance—Power factor—Vector diagram of dielectric	
CHAPTER VI	
THEORETICAL FORMULAE FOR THE CAPACITY OF CONDENSERS	125
Derivation of capacity formulae—Formulae—Condensers in parallel—Condensers in series	
CHAPTER VII	
THE CAPACITY OF ELEVATED WIRES AND AERIALS AND OF UNDERGROUND CABLES	147
Capacity of single and of multiple wires—Single and multicore cables	

CHAPTER VIII

	PAGE
THE USE OF CONDENSERS FOR RADIO PURPOSES	155

Condensers in radio receivers—Classification of radio transmitting condensers—Insulated condensers—Anode and grid condensers—Short wave condensers—Effect of various voltages

CHAPTER IX

THE BASIS OF CONDENSER DESIGN AND CALCULATIONS	206
--	-----

Frequency and wavelength formulae—Natural frequency of circuit—Impedance of circuit—Logarithmic decrement—Current flow in condenser circuits—Condenser slide rule—Charts for condenser calculations

CHAPTER X

THE MEASUREMENT OF CAPACITY AND THE COMMERCIAL TESTING OF CONDENSERS	233
--	-----

Absolute measurements—Comparison methods—Standard condensers—A.C. capacity bridges—Radio frequency measurements—Insulation resistance determinations—Power loss tests

CHAPTER XI

VARIABLE CONDENSERS	275
-------------------------------	-----

Symbols—Laboratory condensers—Development for radio uses—Low loss condensers—Insulation of condensers—Linear condensers—Square law, S.L.F., and logarithmic variables—Vernier and fine adjustments

CHAPTER XII

VARIABLE CONDENSERS WITH SOLID DIELECTRICS	329
--	-----

Ebonite condensers—Tubular types—Mica dielectric variables—"Picking-up" and "laying-down" methods—Celluloid variable condensers—Efficiency of variable condensers

CHAPTER XIII

AIR DIELECTRIC CONDENSERS	339
-------------------------------------	-----

Electrical losses—Corona—Compressed air condensers—High-frequency condensers—Capacity standards

CHAPTER XIV

GLASS DIELECTRIC CONDENSERS	353
---------------------------------------	-----

Leyden jar—Moscicki condensers—Glass plate condensers—Dielectric losses—Special glasses for condensers

CHAPTER XV

PAGE

CONDENSERS WITH LIQUID DIELECTRICS	366
--	-----

Oils as dielectrics—Properties and testing of oils—Dehydration of oil—Power factor of oil—Dielectric strength—Oil dielectric variable condensers—Electrolytic condensers—Solutions for electrolytic condensers

CHAPTER XVI

PAPER DIELECTRIC CONDENSERS	381
---------------------------------------	-----

Early methods of construction—Substitutes for tinfoil—Foiled paper—Mansbridge—Manufacture of foiled paper—Drying of paper—Effects of temperature—Winding of rolled condensers—Impregnation—Wax—Oil—Special methods of construction

CHAPTER XVII

MICA AND MICA DIELECTRIC CONDENSERS	412
---	-----

Mica, its form and composition—Sources—Grades of mica—Mica mining—Design of mica condensers—Multiple sections—Clamping—Insulation—Ring condensers—Terminal insulators—Radio frequency insulators—Large mica condensers—Rugby radio station—Uses in radio installations

CHAPTER XVIII

HIGH-TENSION CONDENSERS AND THEIR APPLICATION TO THE PROTECTION OF POWER DISTRIBUTION NETWORKS	472
--	-----

Surges—Applications of condensers—Use of various types of condensers—Mica—Glass—Cellon—Discharge valves—Protection from H.F. induction

CHAPTER XIX

THE APPLICATION OF CONDENSERS TO POWER-FACTOR IMPROVEMENT OF A.C. CIRCUITS	490
--	-----

Power factor—Effect of condensers—Calculation of condenser size—Paper dielectric condensers—Economical limits to correction

CHAPTER XX

VARIOUS USES AND COMMERCIAL APPLICATIONS OF CONDENSERS	508
--	-----

Electric furnaces—Railway signalling—Electrical ignition apparatus—Telephones—Condenser telephones and microphones—Wired wireless

BIBLIOGRAPHY	527
------------------------	-----

INDEX	629
-----------------	-----

INSET PLATES

FIG.		FACING PAGE
133.	CHART CONNECTING FREQUENCY AND WAVELENGTH OF OSCILLATION CIRCUIT	206
138.	THE BRYDON-HODGSON SLIDE RULE FOR CALCULATIONS ON OSCILLATING CIRCUITS	214
140.	CONDENSER REACTANCE CHART	222
142.	ALIGNMENT CHART FOR CONDENSER CALCULATIONS	224
143.	CAPACITY SLIDE RULE FOR FACILITATING CALCULATIONS ON CONDENSERS	226
147.	CONDENSER kVA CHART	230
358-367.	VIEWS OF THE NEIGHBOURHOOD OF A MICA MINE	420
513-514.	CARRIER-CURRENT CONDENSERS ON OVERHEAD POWER LINES	524

ILLUSTRATIONS

FIG.

	PAGE
1. An Insulated Metal Sphere forming a Simple Condenser	5
2. Field of Electric Lines of Force round an Electron	7
3. Repulsion of Lines of Electric Force between Two Electrons	7
4. Lines of Electric Force between Charged and Uncharged Spheres	8
5. A Simple Air Condenser	10
6. Circuit Arrangement for observing Discharge of Condenser	15
7. Curve of Discharge Voltage of Condenser	16
8. Charging Curve for Condenser	18
9. Symbols for Condensers (usual for large capacities)	21
10. Symbol for Condensers (usual for small capacities)	21
11. Symbol for Variable Capacity Condensers	22
12. Symbol for Variable Capacity Condensers to indicate Moveable Plates	22
13. Symbol for Screened Condenser	22
14. Two forms of Leyden Jar Condensers	25
15. Sectional diagram of Faraday's Apparatus used for Researches on Dielectrics	31
16. Early types of "Billi" Condenser used by Marconi in his early experiments	35
17. An Adjustable Condenser (and resistance) as used in Telegraph Circuits (<i>Automatic Telephone Message No. 1</i>)	37
18. Diagrammatic Representation of the Arrangement of a Dielectric to explain Residual Charge and Absorption	40
19. Dismountable Leyden Jar Condenser	43
20. Dismountable Glass Plate Condenser	44
21. Arrangement to show Absorption of Charge by Condenser Dielectric	45
22. Charging Current Curves of Condenser, showing Absorption of Charge	46
23. Apparatus for Measurement of Dielectric Constant, as used at the National Physical Laboratory	50
24. Amalgamated Electrodes for measuring Dielectric Constant	57
25. Apparatus used by Sayce & Briscoe for measuring Dielectric Constant of Liquids	58
26. Effect of Thickness on Breakdown Voltage	63
27. Effect of Thickness on Dielectric Strength	64
28. Arrangement of Spherical Electrodes for Dielectric Strength Measurements	65
29. Diagrammatic Arrangement of Testing Transformer for Dielectric Strength Measurements	67
30. Potentiometer Arrangement for Control of H.T. Testing Transformer	67
31. Flat Electrodes for Dielectric Strength Measurements	68
32. Flat Electrodes for Dielectric Strength Tests on Impregnated Paper	70
33. Electrodes for Measuring Dielectric Constant of Oil	71
34. Arrangement of Electrodes for Dielectric Strength Measurements on Condenser Oils	74
35. The De Laval-Watson Apparatus for the Commercial Testing of the Dielectric Strength of Oils	75
36. Standard Electrodes for Measuring the Dielectric Strength of Oils	76
37. Arrangement of Thermionic Valve Rectifier, for D.C. Tests on Dielectrics	77
38. Osram E.H.T.1. Rectifying Valve used for D.C. Tests on Dielectrics at high voltages	78
39. Osram E.H.T.3. Rectifying Valve for Testing Dielectrics and Condensers	78
40. Mullard H.T.1. Rectifying Valve, as used for Testing Dielectrics and Condensers	79
41. A Tray of Small Accumulator Cells suitable for Insulation Resistance Measurements on Dielectrics and Condensers (<i>C. A. Vandervell, Ltd.</i>)	80
42. Cambridge High Sensitivity Mirror Galvanometer, for Insulation Resistance Tests on Dielectrics	82
43. Gambrell High Sensitivity Galvanometer, for Insulation Resistance Tests on Dielectrics	83
44. Shunt Box for Galvanometer for Insulation Resistance Tests.	84

FIG.	PAGE.
45. Circuit Arrangement for Insulation Resistance Measurements on Dielectrics and Condensers	85
46. Contacts used for Measuring Surface Leakage of Dielectrics	86
47. Connection of Smoothing Condenser to "Double-wave" Rectification Circuit	98
48. Variation of Voltage at Terminals of Smoothing Condenser	99
49. Insulation Resistance Curve for Impregnated Paper Condenser, showing Absorption	100
50. Insulation Resistance Curve for Mica Dielectric Condenser, showing Absorption	101
51. Variation of Insulation Resistance with Temperature of Oil impregnated Paper Dielectric Condenser	102
52. Variation of Insulation Resistance with Temperature of Mica Dielectric Condenser	103
53. A Galvanometer Test Bench, as used for Research on the Insulation Resistance of Condenser Dielectrics	105
54. Curve of Insulation Resistance of Paper Condenser when exposed to Air, showing Effect of Absorption of Moisture	108
55. Metal Electrodes in Contact with Solid Dielectric	111
56. Same Electrodes as in Fig. 55, but with Air only as the Dielectric between them	111
57. Same Electrodes as Figs. 55 and 56, with Air Spaces between Metal and Dielectric	111
58. "Effective-Resistance" of Condenser in A.C. Circuit	118
59. Vector Diagram of Condenser, with Losses represented by the Effective Series Resistance R	120
60. Curve Expressing Variation of Power-factor of Oiled Presspahn with Temperature	121
61. Curve expressing Variation of Power-factor of Oiled Presspahn with Applied Voltage	122
62. Simple Sphere in Free Space	129
63. Concentric Sphere Condenser	129
64. Two Widely-spaced Spheres of Unequal Size	130
65. Pair of Equal Spheres close together	130
66. Pair of Equal Spheres nearly touching	131
67. Two Unequal Spheres in Contact	131
68. Sphere Suspended above Conducting Plane	132
69. Isolated Thin Disc	132
70. Pair of Parallel Thin Cylinders of Equal Diameter	133
71. Horizontal Wire above Earth	133
72. Two Concentric Cylinders	133
73. Pair of Eccentric Cylinders	134
74. Pair of Parallel Wires of Unequal Diameter	134
75. Group of Parallel Wires Suspended Horizontally above the Earth	135
76. Two Parallel Discs	136
77. Two Parallel Thick Discs	137
78. Pair of Parallel Strips	137
79. Leyden Jar	138
80. Two Parallel Metal Plates with Solid Dielectric partly filling space between them	138
81. Parallel Plate Condenser	139
82. Group of Condensers joined in Parallel	140
83. Group of Condensers in Series	142
84. Multiple Group of Seven Condensers	143
85. Double-shed Telegraph Insulator	145
86. Arrangement of Three Parallel Wires	148
87. Schematic Diagram of Capacities in Three-core Cable	151
88. Schematic Diagram of a Typical Radio Receiving Circuit, arranged to illustrate various uses of Condensers for such Apparatus	153
89. Aerial Circuit Tuning of Radio Receiver with Series-parallel Switch and Two-part Condenser	157
90. The "Duwtcon"—a Special Condenser for Series-parallel Tuning of Aerial Circuit of a Radio Receiver	159
91. A typical Variable Condenser, for use in Radio Receiving Sets (<i>Sterling Telephone & Electric Co., Ltd.</i>)	160
	162

FIG.		
92.	A similar Condenser to Fig. 91, but Fitted with One Separately Constructed Plate, to act as a Vernier for Fine Adjustment (<i>Standard Telegraph & Electric Co., Ltd.</i>)	16
93.	Interior View of a Radio Receiver and Amplifier used for Powered Broadcast Reproduction. An Air Dielectric and Rheostat Dielectric Variable can be seen inside the set.	16
94.	A Small Mica Dielectric Condenser specially constructed for use in the Grid Circuit of Radio Receiving Valve.	17
95.	Dubilier Type 610 Mica Dielectric Condenser, for use in Radio Receiver, with Grid Leak Resistance for Connection to the Spring Clip on the Condenser	16
96.	A Micondon, a Small Condenser, with Grid Leak Resistance for Radio Receiver, as used in U.S.A.	16
97.	A Paper Dielectric Condenser, for use in Radio Receiver.	16
98.	Interior View of a Radio Receiving Set, showing the use of Various Forms of Fixed and Variable Condensers.	16
99.	The Dubirecon. A device using a safety resistance and a bypass condenser in connection with radio receivers (<i>Dubilier Condenser Co., Ltd.</i>)	17
100.	Assembling and Testing Condensers for Radio Receiver in a New York Factory.	17
101.	A Group of Four Types of Small Mica Dielectric Condensers, as used in American Radio Apparatus.	17
102.	American Micondon Condensers arranged for various uses in Radio Receiving Sets.	17
103.	Small Mica Dielectric Condenser, as manufactured in England.	17
104.	Another British Mica Dielectric Condenser for Radio Receiver, arranged to hold a Grid Leak Resistance.	17
105.	A Box of Small Mica Dielectric Condensers for Radio Receiver (U.S.A.).	17
106.	Various forms of German Condensers used in Radio Receiver.	17
107.	A Plug-in Condenser adapted for easily changing the Capacity of the Condenser (<i>Telefunken Co., Germany</i>)	17
108.	A Small French Mica Dielectric Condenser mounted in a Moulded Case.	17
109.	An Early and now nearly Obsolete Pattern of Small Mica Dielectric Condenser, as made for use in Radio Receiver.	17
110.	A Simple Filter Circuit using a Double or "Split" Smoothing Condenser and a Single Choke.	17
111.	An Extension of the Filter Circuit of Fig. 110, using Two Extra Chokes.	18
112.	A Double or "Split" Smoothing Condenser enclosed in a Metal Case, Safety Spark Gaps, and a Discharging Resistance are fitted (<i>Dubilier Condenser Co., Ltd.</i>)	18
113.	A Radio Transmitting Set, showing Smoothing Condenser and Air Condenser (<i>Radio Communication Co., Ltd.</i>)	18
114.	Another Radio Transmitting Set, showing Split Smoothing Condenser (<i>Radio Communication Co., Ltd.</i>)	18
115.	Arrangement of Smoothing Condenser with Safety Spark Gap, Discharging Resistance and Key.	18
116.	A Simple Smoothing Condenser with Safety Spark Gap and Discharging Resistance.	18
117.	A Group of Condensers forming the Smoothing Unit for the Bellini Radio Transmitting Station. (<i>Marconi's Wireless Telegraph Co., Ltd.</i>)	18
118.	Marconi Open Type Spark Gap.	18
119.	A Form of Rotary Spark Gap suitable for Direct Attachment to the Shaft of a Rotary Converter or Motor alternator.	18
120.	Arrangement of Condenser Discharge Circuit with Rotary Spark Gap.	18
121.	Charging Current Curves for Condenser with Resonant Supply Current.	19
122.	Damped and C.W. Wave Forms.	19
123.	Tonic train Wave Form.	19
124.	Variation of Dielectric Losses with Applied Voltage.	19
125.	A Small Condenser for C.W. Radio Transmitting Circuit, with a Mica Dielectric Immersed in Oil (<i>Dubilier Condenser Co., Ltd.</i>)	19
126.	Mica Dielectric Condenser, with Multiple Sections, to give Different Capacity Values for Radio Use. (<i>Deutsche Dubilier Kombinator Gesellschaft</i>)	19
127.	A Valve Radio Transmitter showing Various Condensers Mounted on the Apparatus Framework (<i>Telefunken Co., Berlin</i>)	19

FIG.		PAGE
128.	A Group of Condenser Units, forming part of the Oscillation Circuit of a Radio Transmitter with Switch for Changing the Condenser Connections (<i>Telefunken Co., Berlin</i>)	198
129.	Diagrammatic Connections of Valve Oscillator for Generating High-frequency Currents	199
130.	A Mica Dielectric Anode Feed Condenser for use in connection with Valve Oscillators	201
131.	A Small Anode-feed Condenser enclosed in Porcelain Condenser and Insulated from Earth (<i>Dubilier Condenser Co., Ltd.</i>)	202
132.	A Small Porcelain-cased Condenser for Grid or Anode Circuits of Low-power Valve Oscillators (<i>Dubilier Condenser Co., Ltd.</i>)	203
133.	Chart Connecting Frequency and Wavelength of Oscillation Circuit facing	206
134.	Simple Oscillation Circuit	207
135.	Wave-form of Damped Sinoidal Oscillation	208
136.	A typical Resonance Curve for an Oscillation Circuit, subjected to an E.M.F. of variable frequency	211
137.	Chart for Oscillation Circuit	214
138.	Slide Rule for Calculations on Oscillation Circuits	214
139.	Logarithmic Decrement Chart facing	214
140.	Condenser Reactance Chart facing	222
141.	Chart for Solving the Condenser Equation	224
142.	Alignment Chart for Condenser Calculations facing	224
143.	Capacity Slide Rule for Capacity Calculations on Condensers facing	226
144.	Enlarged Sketch of Portion of Condenser Slide Rule	227
145.	Enlarged Sketch of end of Condenser Slide Rule	229
146.	Groupings of Condenser Units or Sections, in Series-parallel for various Operating Voltages	230
147.	Condenser kVA Chart facing	230
148.	Use of Ballistic Galvanometer for Capacity Measurements	233
149.	Maxwell's Method of Measuring Capacity with a Commutator	236
150.	Fleming and Clinton Commutator Method of Measuring Capacity	237
151.	Thomson's "Method of Mixtures" for Capacity Measurements	238
152.	The Carey-Foster Bridge for Capacity Measurements	239
153.	Campbell Vibration Galvanometer for Capacity Measurements (<i>Cambridge Instrument Co., Ltd.</i>)	240
154.	Campbell Variable Mutual Inductance Standard, as used with the Carey-Foster Bridge for Capacity Measurements (<i>Cambridge Instrument Co., Ltd.</i>)	242
155.	Carey-Foster Capacity Bridge (<i>Cambridge Instrument Co., Ltd.</i>)	242
156.	Non-inductive Resistance Box for A.C. Bridges (<i>Cambridge Instrument Co., Ltd.</i>)	243
157.	Simple-tuned Filter Circuit for A.C. Bridges for Capacity Measurements	244
158.	Fleming and Dyke Filter for A.C. Supply to Capacity Bridges	245
159.	Campbell Frequency Meter (<i>Cambridge Instrument Co., Ltd.</i>)	246
160.	The Carey-Foster Capacity Bridge in use for Measuring Condenser Capacities	247
161.	The Wien Bridge for Capacity Measurements	248
162.	Condenser in Series with Resistance	249
163.	Condenser and Leakage	249
164.	Capacity Bridge by General Radio Co. (U.S.A.)	253
165.	Connections of General Radio Precision Capacity Measurements	254
166.	Precision Variable Air Condenser (<i>General Radio Company, U.S.A.</i>)	255
167.	Interior View of Precision Variable Condenser (Fig. 166)	255
168.	Use of G.R.C. Capacity Bridge with Substitution Method	256
169.	Adjustable Standard (Mica-dielectric) Condenser for use with Capacity Bridge (<i>Dubilier Condenser Co., Ltd.</i>)	257
170.	G.R.C. Precision Capacity Bridge with Standard and Balancing Condensers for Capacity Measurements	257
171.	The Schering Capacity Bridge	258
172.	The Anderson Bridge for Comparison of a Condenser with an Inductance	259
173.	The Wagner Earth Connection as applied to a Wien Bridge	261
174.	The Wagner Earth Connection as applied to a Four-condenser Bridge	261
175.	Weston Microfaradmeter for Capacity Measurements (<i>Weston Electrical Instrument Co., Ltd.</i>)	263

FIG.		PAGE
176.	Testing Small Condensers with Weston Microfaradimeters (<i>Dubilier Condenser and Radio Corporation, N.Y.</i>)	263
177.	Comparison of Condenser Capacities at Radio Frequencies	264
178.	Moullin I. Voltmeter (<i>Cambridge Instrument Co., Ltd.</i>)	264
179.	Measurements Losses with Moullin Voltmeter	265
180.	Evershed Capacity Meter and Insulation Tester (<i>Evershed and Vignolles Ltd.</i>)	266
181.	Neon Lamp for Comparison of Capacities	267
182.	Arc-oscillation Generator (Elwell) for Condenser Testing at Radio Frequencies	269
183.	A Small Valve Installation for Testing Condensers at Radio Frequencies	269
184.	Schematic Diagram of Valve Oscillator for Condenser Testing at Radio Frequencies	270
185.	Temperature-rise Curve of Small Condenser under Radio-frequency Loading	271
186.	Thermal Test of Condenser (745 kVA) showing Temperature Rise of Condenser and Comparison Calibration Readings	272
187.	Radio Frequency Load Test of Large Mica-dielectric Condenser (3000 kVA) with Comparison Calibration Test	272
188.	Testing Plant for Radio Frequency Load Tests of Large Condensers with Constant Temperature Enclosure (<i>Dubilier Condenser Co., Ltd.</i>)	273
189.	Diagrammatic Rotary Plate Variable Air Condenser	274
190.	Plan of Fixed of Variable Air Condenser	276
191.	Early Laboratc Air Condenser	278
192.	Laboratory Standard Air Condenser (<i>Cambridge Instrument Co., Ltd.</i>)	279
193.	Laboratory Standard Variable Air Condenser—Internal Arrangement (<i>Cambridge Instrument Co., Ltd.</i>)	279
194.	A Small Parallel-plate Variable Air Condenser	280
195.	Schematic Diagram of Parallel-plate Condenser	281
196.	Curve of Variation of Capacity with Spacing of Discs in a Parallel-plate Variable Air Condenser	281
197.	A Parallel-plate Variable Condenser with Mixed Mica and Air Dielectric	282
198.	Curve of Variation of Capacity with Spacing of Discs in Parallel-plate Condenser with Mica and Air Dielectric (Fig. 197)	283
199.	Curves relating to Parallel-plate Variable Condensers to illustrate distinction between Figs. 196 and 198	284
200.	Variation of Capacity by Variation of Dielectric Constant	285
201.	A "Neutrodyne" Variable Air Condenser utilizing a Combination of Two Modes of Variation	286
202.	A Small "Neutrodyne" Variable Condenser with Semi-cylindrical Plates	286
203.	A Variable Air Condenser with Electrical Vernier (Vernier Plate)	287
204.	Dual Variable Condenser	289
205.	A Dual Condenser with balancing Vernier Vane (<i>Stephanson Laboratories, New York</i>)	289
206.	A Dual Condenser with balancing Vernier Vane (<i>Dubilier Condenser Co., Ltd.</i>)	289
207.	Dual balanced Condenser, with Balancing Disc between the Two Units (<i>Co., Ltd.</i>)	289
208.	Variable Condenser (<i>Marconiphone Co., Ltd.</i>)	290
209.	Drive for Variable Condensers, to give Slow-motion	290
210.	Air Condenser, showing Friction Vernier Drive (<i>United Radio Corporation, New York</i>)	291
211.	A Double friction Drive for Variable Air Condenser (<i>U.S. Tool Co., U.S.A.</i>)	291
212.	Sectional Diagram of Double friction Drive (Fig. 211)	292
213.	Friction Gearing for Fine Adjustment of Variable Air Condenser (<i>Ormond Engineering Co., Ltd.</i>)	292
214.	Diagrammatic Arrangement of Friction Gearing of Ormond Condenser (Fig. 213)	293
215.	Cosmos Condenser, showing Band Type of Friction Drive for Slow-motion Device (<i>Metrovick Supplies, Ltd.</i>)	294
216.	Rack and Pinion Type of Fine Adjustment for Variable Condensers (<i>Bowyer-Lowe Co., Ltd.</i>)	294
217.	A Geared Condenser for Fine Adjustment (<i>General Radio Co., Mass., U.S.A.</i>)	295

FIG.		PAGE
218.	Cardwell Variable Air Condenser, showing Reduction Gearing (<i>Allen D. Cardwell Mfg. Corp., Brooklyn, U.S.A.</i>)	296
219.	Fine Adjustment of Variable Air Condenser with Chain of Reduction Gearing (<i>Wade Mfg. Co., U.S.A.</i>)	296
220.	Diagram of Vanes of Variable Condenser, illustrating Effective area of Overlap	297
221.	Semi-circular Vanes for Variable Condenser	299
222.	Theoretical Calibration Curve of Ideal Condenser, with Semi-circular Vanes	300
223.	Measured Calibration Curve of Semi-circular Vane Condenser	300
224.	Vane Shapes for Square-law Condenser	302
225.	Alternative Vane Shapes for Square-law Condenser	302
226.	Alternative Vane Shapes for Square-law Condenser	302
227.	Alternative Vane Shapes for Square-law Condenser	302
228.	Calculation of Plate Shape for Square-law Condenser	303
229.	Theoretical Capacity and Wavelength Curves for Ideal Square-law Condenser	304
230.	Wavelength Curves for Linear and Square-law Condensers	305
231.	Theoretical Wavelength Curve of Ideal Condenser with Semi-circular Vanes	306
232.	Wavelength Curves for Linear and Square-law Condensers, with External Gearing, etc.)	307
233.	Diagram of Gearing for Square-law Condenser	307
234.	A Square-law Condenser	308
235.	A Square-law Variable Condenser with Square Plates and Linear Movement (<i>Signal Electric Mfg. Co., U.S.A.</i>)	308
236.	Remler Variable Condenser, with Square-shaped Plates and Insulated Gearing	309
237.	General Form of Plate Shape for Square-law Condenser	310
238.	A Straight-line-frequency (or S.L.F.) Condenser (<i>Igranite Electric Co., Ltd.</i>)	311
239.	Stamping-out the Vanes for Variable Air Condensers	312
240.	Assembling the Vanes of Variable Air Condensers	313
241.	A Die-cast Variable Air Condenser	314
242.	A Die-cast Variable Air Condenser with Semi-circular Vanes	315
243.	Die-cast Variable Air Condenser, with Interleaving Plates (<i>Marconiphone Co., Ltd.</i>)	315
244.	The "Univane" Variable Air Condenser	316
245.	The "Devicon" Bridge Condenser (<i>Autoveyors, Ltd.</i>)	317
246.	The "Three-electrode-variable Condenser" (<i>Autoveyors, Ltd.</i>)	317
247.	Curves showing the Variation of the Movement of the Electrodes in a Dielectric with "Low-loss" Insulation	320
248.	Variable Air Condenser, with "Low-loss" Insulation	322
249.	Variable Air Condenser, with "Low-loss" Insulation	323
250.	"Marco" Variable Air Condenser, with Low-loss Insulation and Friction Adjustment (<i>Martin Copeland Co., R.I., U.S.A.</i>)	323
251.	A Dual Variable Air Condenser, with Insulating End-plates of Reduced Section (<i>Bowyer-Love Co., Ltd.</i>)	324
252.	The "No-loss" Variable Air Condenser, with Isolantite Insulation (<i>General Instrument Corp., U.S.A.</i>)	325
253.	Sterling "Miniloss" Square-law Variable Air Condenser (<i>Marconiphone Co., Ltd.</i>)	325
254.	Variable Air Condenser, with Single Bearing and Friction Slow-motion Drive (<i>Coto Coil Co., R.I., U.S.A.</i>)	326
255.	Burndept Variable Air Condenser (<i>Burndept Wireless, Ltd.</i>)	326
256.	Marconi "Billi" Condenser, Ebonite Dielectric	329
257.	Marconi Variable Condenser, with Ebonite Dielectric (<i>Marconi's Wireless Telegraph Co., Ltd.</i>)	330
258.	Diagram of the Arrangement of Metal Plates in Marconi Ebonite Dielectric	331
259.	Simple Mica Dielectric Variable Condenser	331
260.	General Principle of Mica Dielectric Variable Condenser	332
261.	Polar Mica Dielectric Variable Condenser (<i>Radio Communication Co., Ltd.</i>)	332
262.	Mica Dielectric Variable Condenser (Exterior view) (<i>Connecticut Telephone and Electric Co., U.S.A.</i>)	333
263.	Interior Arrangement of Connecticut Variable Condenser	333

FIG.		PAGE
264.	Mica Dielectric Variable Condenser, utilizing " Picking-up " and " Laying-down " Principle	334
265.	General Circular Mica Dielectric Variable Condenser	334
266.	Spiral pl Variable Condenser	335
267.	Diagrammatic Arrangement of Mica Dielectric using Mercury	336
268.	Faradon Mica Dielectric Variable Condenser (<i>Wireless Specialty Apparatus Co., U.S.A.</i>)	337
269.	Schematic Arrangement of Celluloid Dielectric Variable Condenser	338
270.	Large Air Condenser at Clifden Radio Station (<i>Marconi's Wireless Telegraph Co., Ltd.</i>)	339
271.	View showing Ins e Plates of Clifden Condenser	340
272.	Valve Panels of showing Air Condensers (<i>Radio Communication</i>)	341
273.	The Dielectric Strength of Air at Various Pressures	342
274.	Compressed Air Condenser in Steel Tank (External view)	343
275.	Interior View of Compressed Air Condenser, showing Metal Plates	343
276.	Breakdown Voltage of Gap between Two Circular Metal Discs	344
277.	Large Air Condenser in use at a Valve Radio Transmitting Station (<i>Marconi's Wireless Telegraph Co. Ltd.</i>)	345
278.	One of the Ongar Radio Stations (<i>Marconi's Wireless Telegraph Co. Ltd.</i>)	346
279.	Concentration of Electric Field on Corrugations of Porcelain Insulator	347
280.	Fixed Capacity Standard with Air Dielectric (<i>Cambridge Instrument Co., Ltd.</i>)	347
281.	Double Air Condenser of Fixed Capacity for use in Capacity Bridges	348
282.	Exterior Arrangement of Double Air Condenser (Fig. 281)	348
283.	Four-condenser Bridge	349
284.	Standard Variable Air Condenser with Worm Drive (<i>Cambridge Instrument Co., Ltd.</i>)	349
285.	Interior Arrangement of Standard Air Condenser (<i>Cambridge Instrument Co., Ltd.</i>)	349
286.	Laboratory Screened Variable Air Condenser (<i>Dubilier Condenser Co., Ltd.</i>)	350
287.	Interior Arrangement of Laboratory Variable Air Condenser (<i>Dubilier Condenser Co., Ltd.</i>)	351
288.	Large Scale Laboratory Variable Air Condenser (<i>Dubilier Condenser Co., Ltd.</i>)	352
289.	Tray of Leyden Jar Condensers as used in Early Marconi Apparatus (<i>Marconi's Wireless Telegraph Co., Ltd.</i>)	353
290.	Tubular Form of Glass Jar Condenser with Copper-plated Metal Coatings (<i>Marconi's Wireless Telegraph Co., Ltd.</i>)	354
291.	Marconi $\frac{1}{2}$ kW Rotary Spark Transmitter (<i>Marconi's Wireless Telegraph Co., Ltd.</i>)	354
292.	Leyden Jar Condenser under high voltage, showing Brush Discharge	355
293.	Section of Glass Tube of Moscicki Condenser	355
294.	Moscicki Condenser Battery with Spark Discharger (<i>Isenthal & Co.</i>)	356
295.	Moscicki Condenser for Radio Transmitter (<i>Isenthal & Co.</i>)	356
296.	Moscicki Condenser Battery, showing Porcelain Insulators for H.T. Terminals of Tubes	357
297.	Large Battery of Moscicki Condenser Tubes, Capacity 0.7 μ F, 60,000 volts	358
298.	Modified Moscicki Glass Condenser to avoid Brushing at Edges of Metal	359
299.	Flanged Glass Bottle to Reduce Electric Stress on Glass (<i>A. C. Cossor, Ltd.</i>)	359
300.	Metal Electrodes for Glass Condenser, with Bevelled Edges	359
301.	Method of Assembling the Glass and Zinc Plates in Banks for Marconi Condensers (<i>Marconi's Wireless Telegraph Co., Ltd.</i>)	361
302.	The Marconi Glass and Zinc Plate Condenser for a Rotary Spark Ship Transmitter (<i>Marconi's Wireless Telegraph Co., Ltd.</i>)	361
303.	Glass and Copper Plate Condenser (<i>Telefunken Gesellschaft für drahtlose Telegraphie, m.b.H., Berlin</i>)	362
304.	Telefunken Glass Plate Condenser for Radio Transmitters (<i>Telefunken Gesellschaft für drahtlos. Telegraphie, m.b.H., Berlin</i>)	363
305.	Interior Arrangement of Plate Condenser (Fig. 304)	364
306.	Oil Dielectric Condenser with Solid Insulation External to the Oil.	367
307.	Mechanical Centrifuge Oil Dehydrater (<i>De Laval, Chadburn Co., Ltd.</i>)	369
308.	Oil Dielectric Condenser, constructed by Post Office Engineers at Leaflied Radio Station	370

FIG.		PAGE
309.	General Arrangement of Post Office Oil Dielectric Condenser	371
310.	Oil Dielectric Condenser at Abu Zabal Radio Station, Cairo, Egypt.	373
311.	Filling the Mica Dielectric Condensers at Rugby Radio Station with Dehydrated Oil	374
312.	Oil Dielectric Variable Condenser for Radio Transmitter Apparatus	376
313.	Interior Arrangement of Oil Dielectric Condenser (Fig. 312) (<i>Dubilier Condenser Co., Ltd.</i>)	376
314.	Arrangement of Spaced Plates for Electrolytic Condensers	377
315.	Electrolytic Condenser	377
316.	<i>Générale des Condensateurs Électriques, Fribourg, Suisse</i>)	378
317.	Arrangement of Metal Plates in Swiss Electrolytic Condenser	379
318.	Paper Dielectric Condenser for use with Induction Coil. (<i>Gesellschaft für drahtlose Telegraphie, m.b.H., Berlin</i>)	381
319.	Diagrammatic Representation of Construction of Simple Paper Condenser	382
320.	Carlisle Coating Machine, as manufactured by J. F. Collier & Co., for the manufacture of Foiled Paper (<i>by courtesy of Britains, Ltd.</i>)	386
321.	The "England" Friction Calendar, as used in the manufacture of Foiled Paper (<i>by courtesy of Britains, Ltd.</i>)	387
322.	Absorption Curve of Wax-impregnated Paper Condenser	389
323.	Absorption Curve of Paper Condenser	390
324.	Absorption Curves of Paper Condenser, showing Effect of Charging Voltage	391
325.	Dielectric Absorption as a Function of Insulation Resistance	392
326.	Effect of Temperature on Insulation Resistance (Paper Dielectric)	393
327.	Arrangement of Mansbridge "Breaking-down" Process for Foiled Paper	396
328.	Apparatus for Mansbridge "Breaking-down" Process	397
329.	Curves for Thin Sheets of Dielectric	398
330.	Condenser 5 kVA, 14,000 volts (<i>Gesellschaft für drahtlose T., Berlin</i>)	399
331.	Insulation Resistance for Paper Dielectric Condensers	399
332.	Insulation Resistance of Paper Dielectric Condensers	400
333.	Paper Condenser Manufacture (<i>Société de Trévoux</i>)	401
334.	Cooling Paper Condensers after Impregnation	401
335.	A Wax-impregnated Paper Condenser Plate, with Terminal Tabs ready for assembly	402
336.	A Winding Machine for "Telephone" Type Paper Condensers (<i>Société Anonyme des Condensateurs de Trévoux</i>)	403
337.	Winding Machines for Paper Condensers with Multiple Interleaving Papers (<i>Société Anonyme des Condensateurs de Trévoux</i>)	403
338.	Small Paper Dielectric Condenser (<i>Telegraph Condenser Co., Ltd.</i>)	404
339.	Small Paper Dielectric Condenser (<i>Dubilier Condenser and Radio Corporation, New York</i>)	404
340.	A High Voltage Paper Dielectric Condenser (<i>Société Anonyme des Condensateurs de Trévoux</i>)	404
341.	One Pattern of G.P.O. Telephone Condenser	405
342.	Interior of Telephone Instrument showing Paper Condenser	405
343.	Arrangement of Cooling Channels through Paper Condenser Roll (<i>British Insulated Cables, Ltd.</i>)	407
344.	Oil-immersed Paper Dielectric Condenser in Sealed Metal Tank, 4.5 kVA, 4500 volts, 600 cycles (<i>Gesellschaft für drahtlose Telegraphie, m.b.H., Berlin</i>)	409
345.	Crystalline Form of Mica	413
346.	Hill-side Entrance to Old Indian Mica Mine	417
347.	A Hillside Entrance to the Workings of an Old Mica Mine (Fig. 346)	417
348.	Inside the Entrance to the Workings of an Old Mica Mine (Fig. 346)	417
349.	Overgrown Entrance to a Disused Mica Mine	417
350.	The old-fashioned way of Raising Water and Debris from the Mines	418
351.	A Bengal Jungle Clearing	418
352.	A Jungle Road in Mica Mining Area (Taraghitly)	418
353.	Hand-drilling below ground in a Mica Mine	419
354.	Bundles of Rough Mica as brought up from the Mine	419
355.	Trimming Rough Mica in Bengal	419
356.	Trimming Rough Mica in Bengal	419

FIG.		PAGE
357.	Trimming Mica	420
358.	Grading Rough Mica (India)	
359.	A Gang of Bengal Mica Miners ready to go below ground	
360.	Mica Splitting in India	
361.	Haulage Engine at Lagunwa Mica Mine, Bengal	
362.	Hillside Entrance to Lagunwa Mica Mine	
363.	At the Pit Head of the "Bent Mica" Mine	facing 420
364.	One of the Newer Shafts at the Bent Mica Mine	
365.	Thani Mica Mine, 350 ft. deep	
366.	The Phootlai River, near Mica Mines in Dry Season	
367.	The same River (Fig. 366), in Wet Season	
368.	Sorting Rough Mica into Grades of Different Size	421
369.	Splitting Mica	421
370.	Splitting Mica	422
371.	Electrically Testing Mica for use in Condensers	423
372.	Gauging and Testing Mica for Condensers, in a New York Factory	423
373.	Mica Dielectric Standard Condenser (<i>H. Tinsley & Co.</i>)	424
374.	Mica Dielectric Adjustable Standard Condenser (<i>H. Tinsley & Co.</i>)	424
375.	A Mica Dielectric Condenser in Wood Box	425
376.	Simple Clamp for Condenser Elements illustrating Poor Clamping Effect	426
377.	A Badly-clamped Condenser (Mica Dielectric)	426
378.	Series Arrangement of Condenser Sections	428
379.	Assembling Small Mica Dielectric Condensers	429
380.	A Condenser Stack, S. connected Condenser Sections (<i>Dubilier Condenser and New York</i>)	429
381.	A Long Stack of Series-connected Condenser Sections (<i>Gesellschaft für drahtlose Telegraphie, m.b.H., Berlin</i>)	430
382.	Series Arrangement of Small Condenser Sections for High Voltages, with Clamp	430
383.	A Mica Dielectric Condenser completely enclosed in Moulded Ebonite Case (<i>Deutsche Dubilier Kondensator</i>)	431
384.	A High-voltage Mica Dielectric Condenser Stack enclosed in Insulated Container (<i>Dubilier Condenser Co., Ltd.</i>)	431
385.	Clamp, with Single Insulated End for Mica Condenser	432
386.	Section of Mica Dielectric Condenser, showing Condenser Sections and Clamping	432
387.	Metal Cased Condensers with Single Insulated Terminal	433
388.	Interior Arrangement of Metal-cased Condenser (Fig. 387), showing Sections	434
389.	Central Terminal Principle for Condensers (<i>W. Dubilier</i>)	435
390.	Condenser Clamp with Central Terminal (<i>W. Dubilier</i>)	435
391.	A Metal Cased Mica Dielectric Condenser for Radio Transmitters, provided with a Single Mica-insulated Terminal (<i>Dubilier Condenser Co., Ltd.</i>)	436
392.	A "Faradon" Metal Cased Mica Dielectric Condenser, with Single Mica-insulated Terminal (<i>Wireless Specialty Apparatus Co., U.S.A.</i>)	436
393.	Mica Dielectric Condensers using Central Terminal Principle (<i>Deutsche Dubilier Kondensator Gesellschaft</i>)	437
394.	Mica Dielectric Condenser with Clamp (<i>Deutsche Dubilier Kondensator</i>)	437
395.	A Mica Dielectric Condensers in Metal Cases (<i>Gesellschaft für drahtlose Telegraphie, m.b.H., Berlin</i>)	438
396.	Dubilier Condenser in Metal Box, with Double Terminals	438
397.	A Metal Ring Clamp, containing Condenser Sections	439
398.	Ring Condenser Clamp	439
399.	Section of Mica Dielectric Condenser Sections for use in Ring Condensers	440
400.	A Transmitting Condenser using the Ring Construction (<i>. Co., Ltd.</i>)	441
401.	Interior View of Condenser (Fig. 400), showing Ring Construction	441
402.	Standard Construction of Large Mica Dielectric Condensers in Rings (End View of)	442
403.	Square Mica Dielectric Condensers (<i>Deutsche Dubili</i>)	442
404.	Square Ring Construction for Mica Dielectric Condenser (<i>Deutsche Dubilier Kondensator Gesellschaft</i>)	443

FIG.		PAGE
405.	A Group of Mica Dielectric Condensers of various sizes up to 250 kVA (<i>Deutsche Dubilier Kondensator Gesellschaft</i>)	443
406.	20,000-volt Mica Dielectric Condenser, showing Double Square Rings (<i>Deutsche Dubilier Kondensator Gesellschaft</i>)	444
407.	Multiple Ring Construction of Mica Dielectric Condensers for Large Radio Frequency Currents (<i>Dubilier Condenser Co., Ltd.</i>)	444
408.	External Appearance of Multiple Ring Condenser (Fig. 407)	445
409.	Group of Mica Dielectric Condensers with Insulating Lids and Bushed Terminals (date about 1915)	446
410.	Ship's Rotary-spark Radio Transmitting Set, showing Condenser (<i>Radio Communication Co. Ltd.</i>)	447
411.	A Group of Condensers with Ebonite Bushings for Terminal Insulators	448
412.	Mica Dielectric Condenser in Metal Box, with Ebonite Terminal Bushing (<i>Société Anonyme des Condensateurs de Trébour</i>)	448
413.	Sectional Diagram of Mica Terminal Insulator	449
414.	Mica Terminal Insulator for Condensers (<i>Dubilier Condenser and Radio Corporation, New York</i>)	450
415.	Mica Terminal Insulation for Radio Frequency Potentials (<i>Dubilier Condenser Co., Ltd.</i>)	450
416.	Porcelain Terminal Insulation for Radio Frequency Potentials (<i>Dubilier Condenser Co., Ltd.</i>)	453
417.	Isolantite Terminal Insulation for Radio Frequency Condensers (<i>Dubilier Condenser and Radio Corporation, New York</i>)	453
418.	Mica Dielectric Condenser with Internal (oil immersed) Switch for altering the Condenser Capacity (<i>Gesellschaft für drahtlose Telegraphie, m.b.H., Berlin</i>)	455
419.	Mica Dielectric Condenser for Very Short Radio Wavelengths (<i>Dubilier Condenser and Radio Corporation, New York</i>)	455
420.	Mica Dielectric Condenser for Very Short Wavelengths (<i>Deutsche Dubilier Kondensator</i>)	456
421.	An Oil-immersed Condenser used in the Amplifier Circuits at Rugby Radio Station	456
422.	A Group of Dubilier Mica Dielectric Condensers prior to Installation at Rugby Radio Station	457
423.	Groups of Dubilier Large Oil-immersed Mica Dielectric Condensers at Rugby Radio Station	458
424.	One of Ten Units of Dubilier Mica Dielectric Condensers installed at Rugby Radio Station	459
425.	Internal Construction of Large Mica Condenser (Fig. 424)	459
426.	The Condenser Gallery at Rugby Radio Station	461
427.	Testing the Condenser Sections used in Large Radio Condensers	461
428.	Dubilier Mica Dielectric Condenser Banks for Radio Telephone Installation at Rugby Radio Station	462
429.	The World's Largest Mica Dielectric Condenser, constructed for the Rugby Radio Station	463
430.	Interior Construction of Large Radio Condenser (Fig. 429)	463
431.	The Nauhen (Germany) Radio Station, showing Condenser Banks	464
432.	Telefunken Radio Transmitting Station, showing Condensers (<i>Gesellschaft für drahtlose Telegraphie, m.b.H., Berlin</i>)	465
433.	Telefunken Valve Transmitter, showing Condensers (<i>Gesellschaft für drahtlose Telegraphie m.b.H., Berlin</i>)	465
434.	Bank of Condenser Units in Radio Transmitter (<i>Gesellschaft für drahtlose Telegraphie, m.b.H., Berlin</i>)	466
435.	Group of Condensers in Radio Transmitter (<i>Gesellschaft für drahtlose Telegraphie m.b.H., Berlin</i>)	466
436.	Condenser Unit used in German Radio Stations (Figs. 432-435)	467
437.	Oil-immersed Mica Dielectric Anode-feed Condenser (<i>Gesellschaft für draht- lose Telegraphie m.b.H., Berlin</i>)	467
438.	Adjustable Capacity Mica Condenser, with Switch (<i>Gesellschaft für drahtlose Telegraphie m.b.H., Berlin</i>)	467
439.	Interior Arrangement of Condenser and Switch (Fig. 438)	468
440.	Multiple Capacity Condenser	468
441.	Adjustable Standard Condenser, with Plugs (<i>H. Tinsley & Co.</i>)	469
442.	Adjustable Standard Condenser in Metal Box, with Plugs (<i>Dubilier Condenser Co., Ltd.</i>)	469

FIG.		PAGE
443.	Adjustable Standard Condenser, with Dial Switches (<i>H. Tinsley & Co.</i>)	470
444.	Adjustable Standard Mica Dielectric Condenser with Dial Switches (<i>Dubilier Condenser Co., Ltd.</i>)	470
445.	Interior of 30,000 kW Power Station at Jonage (France), showing Damage by Lightning in 1922	472
446.	Use of Condenser with Choke Coils and Resistance for Flattening Wave-fronts of Travelling Waves	473
447.	General Arrangement of Condensers for Protection of Power Lines	473
448.	Arrangement of Condensers for Protection of Power Lines (<i>Société Générale des Condensateurs Électriques, Fribourg, Suisse</i>)	474
449.	Condenser Protective Equipment on Three-phase Line, using Moscicki Condensers	474
450.	Moscicki Condenser Installation on Three-phase Line	475
451.	Large Banks of Moscicki Condensers for Line Protection	475
452.	Condenser Units for Power-line Condensers	476
453.	Condensers enclosed in Oil-filled Steel Tanks (<i>Société Générale et Appareils Électriques, Paris</i>)	477
454.	Midi Railway Sub-station, with Condenser Protection	478
455.	A 90,000-volt Condenser in Porcelain Container (<i>Dubilier Condenser Co., Ltd.</i>)	479
456.	High-tension Condensers used in Outdoor Sub-station, of Three-phase Overhead Power Line, 90,000 volts (<i>Mühleberg, Switzerland</i>)	480
457.	An Oil-immersed High-voltage Mica Condenser for Power-line Protection (<i>Etablissements Merlin et Gerin</i>)	481
458.	Testing "Cellon" Bands for Condensers (<i>Société Générale des Condensateurs Électriques</i>)	482
459.	Cellon High-voltage Condenser, showing Porcelain Container and Condenser Elements	482
460.	Double-element Cellon Condenser (20,000 volts), with Isolating Link (<i>Société Générale des Condensateurs Électriques, Fribourg, Suisse</i>)	483
461.	A Three-phase Installation of 20,000-volt Condensers (<i>Société Générale des Condensateurs Électriques, Fribourg, Suisse</i>)	483
462.	Transformer Station Protected with Three Cellon Condensers	484
463.	Double-element Suspension Type Cellon Condenser (<i>Société Générale des Condensateurs Électriques, Fribourg, Suisse</i>)	484
464.	Suspension Type Condensers attached to a 70,000-volt Line for Bridging a Transformer for Wired Wireless Signalling (<i>Rhätische Werke für Elektrizität, Thuisis, Suisse</i>)	484
465.	Installation of Condensers mounted on Distribution Pole	484
466.	Arrangement of Condenser and "Valve" Protection for Power Lines	485
467.	Capart Valve for Protection of Power Lines with Condensers (<i>Société Générale des Condensateurs et Appareils Électriques, Paris</i>)	486
468.	Condenser Unit with Discharging Resistances for Surge Dissipation on D.C. Circuits	486
469.	Traction Generator with Condenser Unit	487
470.	Arrangement of Condensers to Protect Electric Machinery from High-voltage Surges	488
471.	Condenser Protective Unit for Electrical Machinery and Condenser and Radio Corporation, New York)	488
472.	Wave Form of Voltage and Current in A.C. Circuit	490
473.	Vector Diagram of A.C. Circuit	491
474.	Simplified Vector Diagram	493
475.	Connection of Condenser to Single-phase Motor	497
476.	Connection of Condenser to Three-phase Motor	497
477.	Oil-immersed Paper Dielectric Condensers for Power-factor Improvement (<i>General Electric Co., New York, U.S.A.</i>)	498
478.	An Oil-immersed Paper Condenser for Power-factor Improvement	499
479.	Paper Dielectric Condenser (with Soli) for Power-factor Improvement (<i>Société Anonyme des Trévoux</i>)	500
480.	Paper Dielectric Condenser Units for Power-factor Improvement (<i>Société Générale des Condensateurs Électriques, Fribourg, Suisse</i>)	500
481.	Switchboard Cubicle Type of Unit Condenser Construction for Power-factor Improvement (<i>General Electric Company, New York, U.S.A.</i>)	501
482.	Oil-impregnated 1200-volt Paper Condenser Units (<i>General Electric Company, New York, U.S.A.</i>)	502

- Fig.
 483. Winding Paper Dielectric Condensers for Power-factor Improvement (*Société Anonyme des Condensateurs de Trévoux*).
 484. Assembling (and Testing) Paper Dielectric Condensers for Power-factor Improvement (*Société Anonyme des Condensateurs de Trévoux*).
 485. Mosciaki Condenser for Power-factor Improvement (*Société Générale des Condensateurs Électriques, Fribourg, Suisse*).
 486. Interior Arrangement of Mosciaki Condenser (Fig. 485).
 487. Mica Dielectric Condenser for Power-factor Improvement, 10 kVA, 6000 volts (*Deutsche Dubilier Kondensator Gesellschaft*).
 488. Multiple Ring Unit for Mica Dielectric Condenser (Fig. 487).
 489. End View of Multiple Ring Unit (Fig. 488).
 490. Oil-immersed Mica Dielectric Condenser for Power-factor Improvement, 0.5 kVA, 9000 volts (*Deutsche Dubilier Kondensator Gesellschaft*).
 491. Mica Condenser for Power-factor Improvement, 3 kVA, 485 volts.
 492. Mica Condenser for Power-factor Improvement, 3.3 kVA, 6000 volts (*Deutsche Dubilier Kondensator Gesellschaft*).
 493. Synchronous Condenser, 7500 kVA, 13,800 volts (*General Electric Co., New York, U.S.A.*).
 494. Automatic Synchronous Condenser, 3000 kVA, 4000 volts (*General Electric Co., New York, U.S.A.*).
 495. Ajax-Northrup High-frequency Electric Furnace Plant (*Electric Furnace Co., Ltd.*).
 496. Ajax-Northrup High-frequency Furnace Plant, showing Condenser Units (*Electric Furnace Co., Ltd.*).
 497. A High-frequency Induction Furnace Equipment, using Silica Valves (showing Large Condenser in Enclosure) (*Radio Communication Co., Ltd.*).
 498. Resonant Impedance Bond for Railway Track Circuit Signalling (*Westinghouse Brake and Saxby Signal Co., Ltd.*).
 499. Parts of Impedance Bond (*Westinghouse Brake and Saxby Signal Co., Ltd.*).
 500. Oil-immersed Paper Dielectric Condenser, as used for Railway Signalling Circuits.
 501. An Electrostatic Loud Speaker (*E. Reisz, Berlin*).
 502. Electrostatic Loud Speaker (*E. Reisz, Berlin*).
 503. Arrangement of Low-voltage Lamp and Condenser.
 504. Arrangement of Coupling Condensers for Wired Wireless Communication along Power Lines.
 505. Wired Wireless Coupling Condenser for 50,000 volt Lines (0.001 μ F), with Bakelized-paper Dielectric (*Telefunken Co., Berlin*).
 506. Another Form of Coupling Condenser for Wired Wireless, with Bakelized-paper Dielectric (Test Voltage 160,000 volts) (*Telefunken Co., Berlin*).
 507. Mica Dielectric Coupling Condenser for Wired Wireless, on 10,000 volt Lines (*Deutsche Dubilier Kondensateur Gesellschaft*).
 508. Mica Dielectric Coupling Condenser for Wired Wireless, with Rain Shield for Outdoor Use (*Dubilier Condenser and Radio Corporation, New York*).
 509. A Group of Carrier-current Coupling Condensers during Manufacture (*Dubilier Condenser and Radio Corporation, New York*).
 510. Indoor Installation of Condensers (110,000 volts), using Bakelized-paper.
 511. Coupling Condensers at 50,000 volts.
 512. Wired Wireless Coupling Condensers at 50,000 volts Outdoor Sub-station.
 513. Carrier-current Condensers connected to Overhead Power Lines (132,000 volts) at Sunnyside Sub-station, Ohio Power Co., Canton, Ohio.
 514. Another View of Condensers at Sunnyside Sub-station, Ohio.

ELECTRICAL CONDENSERS

CHAPTER I

THE NATURE AND FUNDAMENTAL PROPERTIES OF CONDENSERS

THE word "condenser" as applied to a certain piece of electrical apparatus, has during the past few years become one popular and everyday use. Prior to the use of radio apparatus on a large scale for broadcast reception, the word was known only as referring to a certain type of scientific instrument and by a comparatively few engineers concerned with employment of "condensers" in certain radio and in special commercial applications. Radio broadcasting is thus primarily responsible for the popularization of this and of many another apparatus which would otherwise in all probability not have emerged from the laboratory for many more years to come.

These remarks apply mainly to certain specific types "condensers" which have especial application in radio receiving apparatus; but it is no less true to say that the developments which have taken place in radio communication methods generally during the past decade, have equally been responsible in great degree for the developments in other classes and types of electrical "condensers." This statement is not meant to imply that condensers had no commercial or industrial applications prior to the above-mentioned developments, for this is far from the case, but by the application of these developments not only may the article employed in known uses be improved, but new uses may be created for the improved articles thus produced.

In the case of the development of "condensers" brought about by the demands of radio communication, not only

the increased demand for a certain class of apparatus been productive of improved manufacturing methods, but as a secondary result of that demand, a much augmented financial expenditure has been possible on research work dealing with the scientific problems associated with the development of other classes of "condensers" and of "dielectrics" for use in "condensers."

"What is an Electrical Condenser?" The multitudinous forms in which condensers are constructed, and the very many purposes for which they may be used, render a very precise definition of the word somewhat difficult, especially as many modern applications of condensers make use of properties which were not suspected when condensers were first discovered. Expressing it in quite general terms, it may be stated that "anything in or on which an electric charge can be stored, may be called a 'condenser.'" In practical everyday use, however, the word "condenser" is given a much more restricted meaning, and is applied only to definite pieces of electrical apparatus in which, by their design, the property of storing electric charges has been concentrated as much as possible.

Another and older definition has been expressed as follows: "A condenser consists of a conductor, or conductors, arranged to have a specially large capacity." This, as will be shown later, is merely another way of expressing the generalized definition set out in the preceding paragraph, and while this is really a true definition if applied to all the parts or elements of a condenser, it does not at first sight appear to apply in the strict sense to many modern forms of condensers, in which for certain electrical reasons the capacity is small, although the physical bulk is large.

There is, as will be shown later, some connection between the storage of an electric charge, and the storage of electrical energy, and as a result, a better definition of a condenser can be expressed in terms of such energy storage as follows—

A condenser consists of a dielectric bounded by two conductors insulated from one another, the capacity for storing electrical energy being large for the volume of dielectric employed.

The "dielectric" referred to in this definition is an essential part of every electrical condenser, and is the part of the condensers which is mainly responsible for the properties of the condenser itself. The term is due to Faraday who coined it in connection with his fundamental researches into the nature of dielectric action.

For a proper appreciation of the true nature of a condenser, and of the part played by the dielectric in forming a condenser, it is essential to consider first the most elementary form of condenser and the mode in which it acts. The form in which the action of condensers was first discovered—the Leyden jar (see Chapter II)—is not, perhaps, the simplest type of condenser, but, taken in conjunction with the ideas of those days and with other apparatus used at that time, it provided the name "Condenser"—a name which has persisted until to-day, in spite of the very many varieties now known. and in spite of the fact that it is really a misnomer.

The early theories of electricity, current in the latter half of the eighteenth and part of the nineteenth centuries, considered electricity to consist of either one or of two fluids—fluids which could not be seen or weighed, but which made their presence felt in the various electrical phenomena then known. It was found possible to store up the "electric fluid" in a glass bottle filled with water, and hence what more natural name for this device than an electrical "condenser." These old fluid theories have long since gone by the board, and have been replaced by the electron theory, hinted at by Clerk Maxwell in 1873, and later developed by G. J. Stoney ⁽⁵⁾ and others ^(3 and 12).*

The electron may be termed the atom of electricity, and modern views hold that every atom of matter has a number of electrons as part of its structure. Every electron has the same negative charge,† and hence, when an electron is removed from an atom, the effect produced is that of a positive charge on the atom.

* These numbers refer to the numbered Bibliography to be found at the end of the volume

† The terms positive and negative, as applied to electric charges, were first fixed in a quite arbitrary manner.

The electron theory may be said to have resulted from many different lines of scientific inquiry and research. Of these, three may perhaps be mentioned : Electrolytic action ; electro-optical effects ; and the phenomena of electrical discharges through rarefied gases. The laws of electrolysis, discovered by Faraday, pointed directly to an atomic constitution for electricity, for they showed that each chemical atom, of whatever its nature, always transported a definite quantity of electricity or an integral multiple of that quantity. Maxwell's electromagnetic theory of light suggested that all material particles carry electric charges, and Zeeman's discovery in 1896 of the change of frequency of lines in the spectrum when the light source was subjected to a magnetic field, provided a confirmation of this hypothesis. Probably the most striking verifications of the actual physical existence of electrons have been furnished by experiments on electric discharges in partially exhausted bulbs. Crooke's experiments, conducted between 1875 and 1890 made visible the effects of streams of electrons passing through rarefied gases ; and the subsequent researches in particular by Sir J. J. Thomson and Sir Ernest Rutherford have enabled many of the properties of electrons and of the chemical atoms and ions to be investigated.

The ratio of the electric charge to the mass of an electron has been found by such experiments to be about 18,000,000, whereas the corresponding ratio for hydrogen, which is the lightest known chemical atom, is only 9577. If, then, the hydrogen ion in electrolysis carries the same charge as one electron, as has been demonstrated in other ways, it follows that the electron must be a very much lighter particle than the hydrogen atom. The ratio of the above quantities indicates that its weight is approximately $\frac{1}{1843}$ of that of the hydrogen atom. The mass of the electron is, however, thought to be entirely electromagnetic in nature, and therefore to depend upon the speed with which the electron moves through the ether.* Quite recently, Sir Oliver Lodge (⁹)† has suggested

* The ether is the name given to the imponderable material which is assumed to fill all space and all substances. It is the medium through which electric fields and electric waves are transmitted.


† These numbers refer to the numbered Bibliography to be found at the

that an electron may really be merely a species of "hole" or "bubble" in the universal aether, and that the aether removed from the centre of the electron and concentrated in the interior of the positive residuum of the atom from which an electron has been removed, may explain the large mass of the atom as compared with the electron. This, however, is at present merely speculation—and awaits definite proof or disproof as the case may be.

The extreme lightness of the electron explains the fact that even the addition of very large numbers of electrons in a charge given to a piece of metal, does not appreciably alter the weight of that material. We can only detect the presence of electric charges on materials by the electrical effects set up, and not by any mechanical or visual change in the material. Usually these effects occur only between two pieces of material or matter carrying electrical charges; and these effects in fact are largely the basis of condenser action as will now be explained more fully.

A negative electric charge is given to a substance when it is given an excess of electrons; and a positive charge when some electrons are removed, leaving less than the normal number. In materials which can conduct electricity readily—e.g. most metals—a certain number of electrons are free to move about under the influence of any electric force which may be applied to them, but some always remain bound to the atoms and cannot be removed unless the atom is broken up or dissociated. In other substances—i.e. electrical insulators—there are very few free electrons, and these can only move about in the material with very great difficulty.

If a piece of metal—say, for example, a sphere (Fig. 1)—is suspended by an insulating thread, so that electrons are prevented from moving on to or off the sphere (the air



GROUND
 FIG. 1. AN INSULATED METAL SPHERE FORMING A SIMPLE CONDENSER

surrounding the sphere is also an insulator), the arrangement constitutes a very elementary condenser. If an electric charge, consisting of a huge crowd of electrons, is put on to the sphere by some suitable means, the nature of which is immaterial for the purposes of the present argument, it will not be able to escape from the sphere owing to the insulation. The sphere thus becomes a means of storing an electric charge.

The quantity of electricity which can be stored on this metal sphere is somewhat limited, depending upon the size of the sphere, and upon its distance from other objects. The ability of the sphere to store the electric charge is referred to as its *capacity*. The *capacity* of any condenser may thus be regarded as a measure of its electrical size.

Since all electrons carry the same charge, of the same sign, they all repel one another, and it follows necessarily that work must be done to bring electrons near to one another against this repulsive force. In other words, to increase the electric charge on the above sphere some work must be expended. This factor then sets some limit to the amount of the charge which can be put on to the sphere.

Then, again, owing to this repulsive force, the electrons will spread themselves over the surface area of the sphere and will not be distributed throughout the interior. The effect of this repulsive force may be likened to an "electronic pressure" tending to force the electrons out of the metal. Since the surrounding air is an insulator, the electrons cannot escape, unless the electronic pressure becomes very great, when ultimately the air will break down, and a spark will pierce it. This is what occurs when a lightning flash passes from a cloud to the earth, the coalescence of raindrops in the cloud gradually concentrating the electrons and increasing the pressure—or, as it is called in electrical parlance, the *voltage*—until the spark passes and some electrons escape.

Obviously, the bigger the sphere, the more electrons can be crowded on to it before the voltage (or pressure) is raised to a given amount, or in other words, the *capacity* of a larger sphere for storing electrons, is greater. There is, in fact, a simple relation between these three quantities. the capacity

being defined as the quotient of the charge by the voltage. Hence, the unit of capacity is defined as the capacity of a condenser such that the addition of unit charge to it raises the voltage to unity.

Expressing this definition in everyday electrical units, it may be written—

A condenser has unit capacity when a charge of one coulomb raises its potential to one volt.

This unit is called the *farad*, named after Michael Faraday, who carried out much of the original research work on the phenomena associated with condensers.




FIG. 2.
FIELD OF ELECTRIC LINES
OF FORCE ROUND AN
ELECTRON

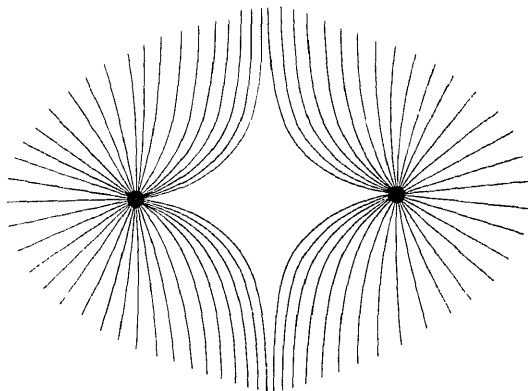


FIG. 3. REPULSION OF LINES OF ELECTRIC FORCE
BETWEEN TWO ELECTRONS

In metals, and all electrical conductors, electrons are free to move about under the action of the forces naturally existing between them and of any external forces. If electrons are added to one part of a conductor, and are left to themselves, they will immediately distribute themselves over the entire metal surface by virtue of the repulsive action between them. In electrical insulators, electrons are not free to move, and consequently, if some are added to one part of an insulator they will not be able to distribute themselves over the material, but will remain in a more or less concentrated condition. If left for prolonged periods, a redistribution of electrons over the surface of an insulator will usually take place, as no insulator

is quite perfect, but can conduct to a very slight extent. The fact that two charges of opposite sign (positive and negative) can exist simultaneously on an insulator without mixing, explains the name bestowed upon such materials—viz. *dielectric*. This name was given by Faraday, who first investigated their properties (¹⁴).*

The field of force which surrounds each electron may be visualized by imagining a series of electric *lines of force* radiating from every electron (Fig. 2). These lines, if they commence at an electron, must all terminate on a positive charge, and by assuming that such lines are like strings of elastic, always




FIG. 4. LINES OF ELECTRIC FORCE BETWEEN CHARGED AND UNCHARGED SPHERES

tending to shorten themselves, the attraction between positive and negative charges can be visualized. Likewise, if these lines mutually repel one another, the field of repulsive force between two electrons can likewise be pictured (Fig. 3).

Bearing this in mind, it becomes possible to explain what occurs when another insulated conductor is brought up into the neighbourhood of the charged sphere which has already been discussed. Such a second conductor is sketched at A in Fig. 4. If the sphere S is charged with electrons, the electric lines of force radiating from it will repel the free electrons, in the second sphere A, as far away as possible from the first sphere, and the lines of force between the spheres will end on the resulting positive charges on the side of A nearest to S. These positive charges will result from the removal of electrons from this face of the sphere, due to the repulsive action of the electrons on S, leaving positively charged atoms or "ions." The second conductor will thus have induced in it the two charges, positive and negative, these being kept apart by the field due to the charge on S.

* See also Chapter II

The proximity of the induced positive charge on A will concentrate the electric field, and will increase the effective capacity of the first sphere, since a greater charge can be put on to S than before, without raising its voltage to a higher value. The capacity of the condenser formed by S and A will therefore be greater than the capacity of the single sphere S by itself.

The nearer together that the two spheres are brought, the greater will become the concentration of electrons on the side of S nearest to A, leaving the opposite face of S freer of electrons, and therefore able to receive more. The capacity of the condenser formed by the two spheres S and A is therefore a function of the spacing between the spheres, increasing as this spacing is reduced. This relation is considered in detail for various specific forms of condensers in Chapter VI.

As far as the action of the condenser formed by the two spheres in Fig. 4 is concerned, the presence of the induced negative charge on the sphere A, consisting of the electrons which have been repelled to the part of the surface farthest from S, is not necessary. In the actual case sketched in Fig. 4, the presence of this induced negative charge will somewhat modify the electric field between the two spheres, and therefore will have some slight influence upon the effective electrical capacity of these spheres. Under normal conditions one sphere would have a negative charge, and the other a positive charge only.

In essential form, therefore, an electrical condenser has three parts—two metallic, or at least electrically conducting, parts which serve as the electrodes on to which the electric charges can be put; and an electrical insulator, or dielectric separating the two conductors. In practical constructions of condensers, as will be described in later chapters of this volume, other subsidiary parts become necessary, such, for example, as parts to support and hold the essential elements of the condenser, boxes or cases to contain these parts, and special insulators to support and hold terminal bolts to which external conductors can be connected to enable the condenser to be joined into the electrical circuit in which it is to be used.

In Fig. 4, the two spheres *S* and *A* constitute the two conductors of the condenser, and the air separating them is the electrical insulator or dielectric. While this pair of spheres, therefore, exhibits the essential features of a condenser, the arrangement would not ordinarily be termed a condenser, since as has already been explained, the name is generally reserved for definite pieces of apparatus. Two spheres suspended by threads, is scarcely a sufficiently rigid or definite construction to come within the scope of this definition.

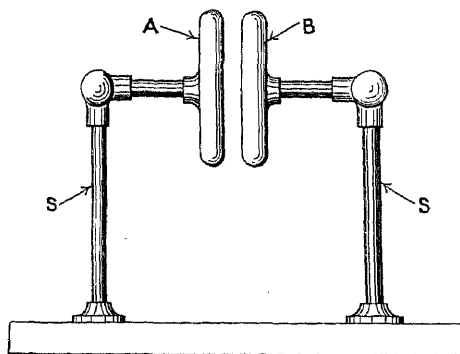


FIG. 5. A SIMPLE AIR CONDENSER

A simple form that complies with this definition of a condenser is sketched in Fig. 5. It consists of two metal discs, *A* and *B*, supported parallel to each other by means of insulating rods *SS*, which may conveniently be made of glass, or ebonite, or other equivalent good electrical insu-

lator. A form of condenser similar to this was used a great deal in many of the early experiments on electrostatics carried out many years ago by the early workers in this field.

The two discs may be charged up by pumping electrons into one of them, from some convenient source (the nature of which is immaterial at present), and so giving that one a negative charge; and extracting a like number of electrons from the other, and so giving that one a positive charge. These two charges will be equal in magnitude, and either of them may be denoted by the algebraic symbol Q . The presence of these charges on the two discs will give rise to a potential difference between them, which is defined as the work required to be expended to move a unit electric charge from one disc to the other, against the forces exerted by the charges on the discs. This potential difference may be denoted by the symbol V .

employed as the standard abbreviation for the fraction of one-millionth, so that the unit called the microfarad can be represented by the symbol μF . Similarly the micromicrofarad unit is written $\mu\mu\text{F}$.

Occasionally, also, the prefix symbol m, meaning "milli," or one-thousandth, is employed in connection with condensers. Thus mF stands as a symbol for a unit which may be termed the millifarad (0.001F); and $m\mu\text{F}$ for the millimicrofarad (0.000000001F). These two subsidiary units, however, are very rarely used.*

From a further consideration of the simple condenser that has been sketched in Fig. 5, it is possible to derive an expression for the energy that is stored up in a condenser when an electric charge is given to it. As has already been mentioned, the potential difference V between the two discs is defined as the work that must be done to move a unit electric charge from one disc to the other. Hence, if a small quantity of electric charge represented by the symbol δQ is imagined as being transferred from one disc to the other against the force due to the potentials of the discs, the work that must be done to effect this transfer is $V\delta Q$. To effect the transfer of the entire charge Q from one disc to the other—such as would be a means of establishing the electric field between the two discs in the first instance—the work that must be done is

$$\int_0^Q V dQ$$

* Certain other abbreviated prefixes and symbols are also in common use, based on international agreements. These will be employed throughout this book in connection mainly with other electrical units, viz. resistance, voltage, current, etc.

Prefixes : μ = micro- (one millionth)
 m = milli- (one thousandth)
 k = kilo- (one thousand times)
 M = meg- or mega- (one million times)

Symbols : F = Farad (unit of capacity) general symbol C
 H = Henry (unit of inductance), general symbol L
 Ω = Ohm (unit of resistance), general symbol R
 A = Ampere (unit of current), general symbol I
 V = Volt (unit of voltage), general symbol V
 Coulomb (unit of quantity or charge), general symbol Q

The relation between Q , V , and the capacity of C the condenser, has already been given, viz. $Q = CV$.

Hence, by substitution in the above integral, the total work to be done becomes

$$\begin{aligned} W &= \int_0^Q V dQ = \int_0^Q (Q/C) dQ = \frac{1}{2} Q^2/C \\ &= \frac{1}{2} CV^2 \end{aligned} \quad (2)$$

This expression therefore represents the work that must be expended to establish the electric field between the plates of the condenser, when it is charged up, and is consequently the energy stored up in the condenser when the field has been established.

To charge up a condenser, say, from a battery or other similar source of electrical energy, a current must flow into the condenser plates for a short period until the charges are established. Expressed in terms of the electron theory, this current flow consists of the movement of electrons from the negative terminal of the battery, which has a high electron pressure, into one of the plates of the condenser, which flow or movement will continue until the potential difference between the plates of the condenser has risen to the same as that of the battery used to charge them. The movement of electrons into one of the plates will be accompanied by a corresponding movement out of the other plate back into the positive pole of the battery. Thus, to all apparent evidence, the charging up of the condenser is accompanied by an apparent flow of current through the condenser for a very short period. The larger the capacity of the condenser, the greater the number of electrons that must pass into the plates, and therefore the longer will this charging current persist before the condenser plates reach the same potential difference as that applied from the battery.

Likewise, when a condenser has been charged up and insulated from the charging source, a discharge current can be drawn from it by connecting the two plates together through a piece of wire. All the energy that has been stored up in the electric field between the condenser plates will be returned by the condenser by this discharge current. This energy